

PIEZORESISTIVE PRESSURE TRANSMITTERS

HIGH VOLUME / LOW COST / AUTOMOTIVE AND INDUSTRIAL APPLICATIONS

SERIES 22 M (BRASS) SERIES 22 S (STEEL)

Series 22 offers a reliable cost effective solution for customers requiring medium to high quantities, of mass produced transmitters. Utilising the KELLER automatic brazing lines, this new technology allows crevice-free construction of the pressure port with no internal seals or O-rings, making possible high volumes at low cost. In the brass 22 M, a steel insert and a nickel diaphragm are brazed into a brass housing. In the steel 22 S, all parts are stainless steel (AISI 316 L). The glass feed-through header and silicon pressure sensor are welded to the steel insert underneath the oil filling.

The electronic circuit is fitted to the Packard plug. EMC-protection-components are mounted on the plug side, the amplifier on the sensor side. A flexible printed circuit "TAB" connects the sensor with the electronics. The transmitters are designed to have exceptionally good EMC ratings and operate over a wide temperature band, ideal for automotive, hydraulic and refrigeration control applications.

Specifications	Pressure Ranges								
	PAA-22 M / PAA-22 S	5	10	20	30				bar
PA-22 M / PA-22 S	5	10	20	30	50	100	200	250	bar
Overpressure	15	30	60	90	150	250	300	300	bar

PAA: Absolute. Zero at vacuum PA: Sealed Gauge. 1000 mbar absolute

Supply	5 V ± 0,25 V
Output	0,5 V...4,5 V ratiometric
Accuracy (Comp. Temp.-Range)	± 1 %FS (0...50 °C)
	± 2 %FS (0...80 °C)
	± 4 %FS (-40...125 °C)
Insulation @ 50 V	≥ 10 MΩ
Vibration / Shock	10 g / 5...2000 Hz, axes X/Y/Z / 20 g sine 11 ms
Response Time	(0...99%) < 10 msec
Pressure Connection	3/8"-24 UNF-2A (with O-ring*), 7/16"-20 UNF (female), G1/4" (with O-ring*)
EMC	EN 61000-6-1...4 / EN 61326-2-3
Homologation	E4-110R-000036 and E4-10R-020927 (only for series PA-22M, 80703.15, ratiometric, 3/8"-24 UNF-2A)
Protection	IP67
Weight	≈ 40 g
Options	Intermediate ranges, customer-specific housings, mating plug with cable

*oil and water resistant




Series 22 M
3/8"-24 UNF-2A



Series 22 S
7/16"-20 UNF



Series 22 S
G1/4"

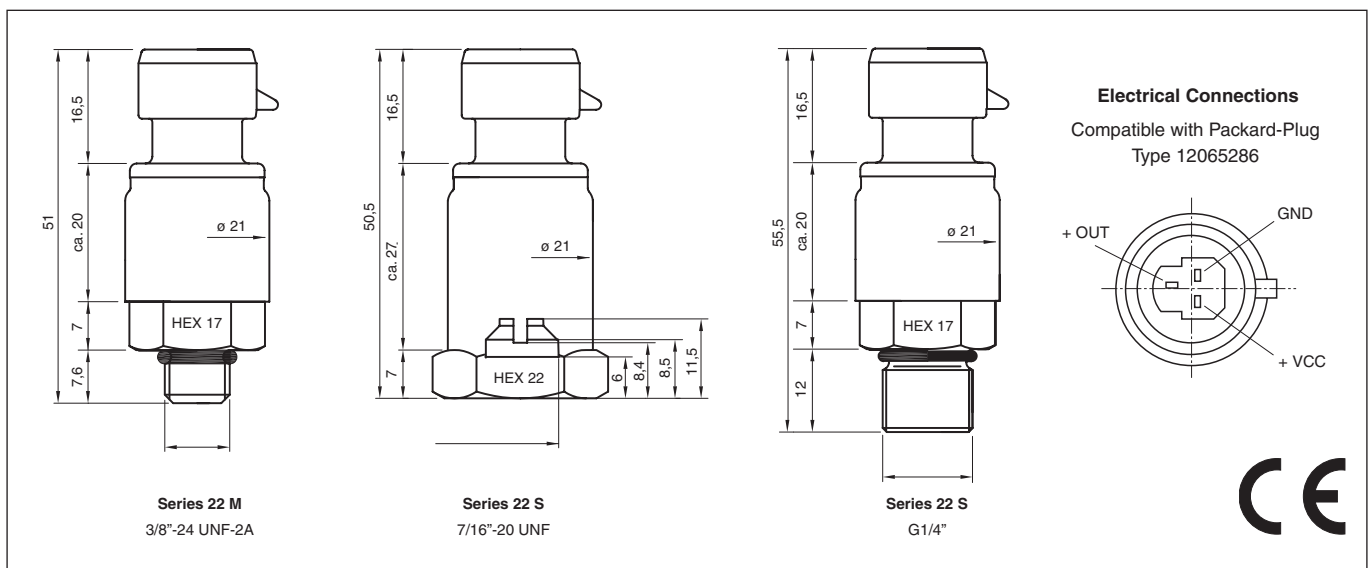

Subject to alterations

10/07

KELLER AG für Druckmesstechnik
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119
Schwarzwaldstrasse 17

CH-8404 Winterthur
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00
Fax +49 (0)7745 - 9214 - 60